

Parameter-Free High-Dimensional Screening Using Multiple Grouping of Variables

Divyanshu Vats

Institute for Mathematics and its Applications

University of Minnesota - Twin Cities

email: dvats@ima.umn.edu

Abstract

Screening is the problem of estimating a superset of the set of non-zero entries in an unknown p -dimensional vector β^* given n noisy observations. In the high-dimensional regime, where $p > n$, screening algorithms are useful for reducing the dimensionality of β^* . This allows for using computationally challenging algorithms, such as cross-validation or stability selection, for estimating β^* and/or the set of non-zero entries in β^* . We propose a novel framework for screening, which we refer to as Multiple Grouping (MuG), that groups variables, performs variable selection over the groups, and repeats this process multiple number of times to estimate a sequence of sets that contains the non-zero entries in β^* . Screening is done by taking an intersection of all these estimated sets. We show how MuG, when used in conjunction with the group Lasso estimator, can consistently perform screening and reduce the dimensionality of β^* . The main advantage of using MuG in conjunction with the group Lasso is that it leads to a parameter-free screening algorithm so that screening can be done without using any tuning parameter. Our numerical simulations clearly show the merits of applying the MuG framework in practice.

1. Introduction

Let $\beta^* \in \mathbb{R}^{p \times 1}$ be an unknown p -dimensional vector. Let $y \in \mathbb{R}^{n \times 1}$ be a *known* n -dimensional vector that captures information about β^* using the linear model

$$y = X\beta^* + w, \quad (1)$$

where $X \in \mathbb{R}^{n \times p}$ is a *known* design matrix and w is measurement noise. Equation (1) is well studied in the literature owing to its application in many real world problems. For example, in compressive sensing, it is of interest to measure a signal (image, video, or sound) β^* using only a few measurements using the linear model (1) with a suitable choice of the design matrix X (Candès et al., 2006; Donoho, 2006). Given gene expression data, where typically the number of observations n is much smaller than the total number of genes p , it is of interest to study the relationships between genes (Wille et al., 2004). These relationships are captured in the vector β^* and the observations y and X are known. A similar problem of estimating relationships arises when modeling economic data (Fan et al., 2011b).

All the problems mentioned above are typically high-dimensional such that $p > n$. This means that the least-squares estimate is not possible to compute. An alternative is to impose structure on β^* and a common structure is to assume β^* is sparse so that only a few entries in β^* are dominant and the rest are zero. Under the sparsity assumption, one way of estimating β^* is by solving an ℓ_1 -regularized least-squares problem, often referred to as the Lasso (Tibshirani, 1996):

$$\text{Lasso: } \hat{\beta}^0(\lambda) = \arg \min_{\beta \in \mathbb{R}^p} \left\{ \frac{1}{2n} \|y - X\beta\|_2^2 + \lambda \|\beta\|_1 \right\}. \quad (2)$$

Given an estimate $\hat{\beta}^0(\lambda)$, let $\hat{S}^0(\lambda)$ be the support of $\hat{\beta}(\lambda)$ so that it contains all indices that are non-zero:

$$\hat{S}^0(\lambda) = \{j : \hat{\beta}_j(\lambda) \neq 0\}. \quad (3)$$

Throughout this paper, we assume β^* is k -sparse with support S^* such that

$$S^* = \{i : \beta_i^* \neq 0\} \text{ s.t. } |S^*| = k. \quad (4)$$

Properties of the solutions $\hat{\beta}^0(\lambda)$ and $\hat{S}^0(\lambda)$ are well studied in the literature, see (Zhao and Yu, 2006; Meinshausen and Bühlmann, 2006; Wainwright, 2009; Meinshausen and Yu, 2009; Negahban et al., 2010) for some of these results and (Bühlmann and Van De Geer, 2011) for an extensive review of these results. Informally, these results establish conditions under which there *exists* a λ such that the estimates $\hat{\beta}^0(\lambda)$ and $\hat{S}^0(\lambda)$ are consistent¹. The choice of λ depends on the statistics of the noise w , which is either unknown or difficult to estimate, especially when $p > n$. Alternatively, if k is known, λ can be selected by solving (2) for multiple different values and choosing a solution $\hat{\beta}^0(\lambda)$ that is k -sparse. Unfortunately, k is typically unknown and difficult to estimate accurately.

1.1 Motivation

It is clear that choosing an appropriate tuning parameter λ when solving (2) is non-trivial since the optimal choice of λ depends on the unknown signal β^* and the unknown statistics of the measurement noise w . In practice, it is common to use model selection algorithms, such as cross-validation, stability selection (Meinshausen and Bühlmann, 2010), or other information criterion based methods for estimating λ . Both cross-validation and stability selection can be computationally challenging to implement and require specifying suitable regions where an optimal λ may be found. Although information-criterion based methods, such as the Bayesian information criterion (BIC), are computationally tractable, they are not suitable for high-dimensional problems (Meinshausen and Bühlmann, 2010). An extension of BIC, referred to as EBIC (Chen and Chen, 2008), is suitable for high-dimensional problems. However, the performance of EBIC depends on a suitable choice of a parameter that controls the number of variables selected.

The problem of choosing an algorithmic tuning parameter is not limited to the Lasso. Other algorithms for estimating β^* under the sparsity constraint, such as forward-backward selection (FoBa) (Zhang, 2011), orthogonal matching pursuit (OMP) (Pati et al., 1993; Davis et al., 1997; Tropp and Gilbert, 2007), or multi-stage algorithms (Zou, 2006; Bach, 2008; Wasserman and Roeder, 2009; Meinshausen and Bühlmann, 2010; van de Geer et al., 2011), also require specifying a tuning parameter.

One way of reducing the computational burden of model selection algorithms is to first estimate a superset of S^* . This is known as variable screening or simply *screening* (Fan and Lv, 2008). In other words, we want to estimate a superset of S^* , say $\bar{S}$, such that $|\bar{S}| < p$. Given that $S^* \subseteq \bar{S}$, we can rewrite the model in (1) as

$$y = X_{\bar{S}}\beta_{\bar{S}}^* + w, \quad (5)$$

where $X_{\bar{S}} = (X_s : s \in \bar{S})$ is a $n \times |\bar{S}|$ matrix and X_i is the i th column of X . Thus, screening reduces the dimensionality of the problem from p to $|\bar{S}|$. This can lead to significant reductions in using model selection algorithms when $|\bar{S}| \ll p$. Current algorithms for screening, which we review

¹Consistency of $\hat{\beta}^0(\lambda)$ does not necessarily imply consistency of $\hat{S}^0(\lambda)$. Thus, the λ chosen to achieve consistency of $\hat{\beta}^0(\lambda)$ and $\hat{S}^0(\lambda)$ can be different.

in Section 1.3, require specifying a suitable tuning parameter. Our main contribution in this paper is to propose a framework for screening that can be used to estimate $\bar{S}$ in a parameter-free way so that estimating $\bar{S}$ does not require specifying a tuning parameter.

1.2 Main Contributions

The main contributions in this paper are summarized as follows.

Multiple Grouping (MuG): We propose a general framework for screening that groups variables, performs variable selection over the groups, and repeats this process multiple number of times over different choices of the groupings. The final estimated superset is the *intersection* of the supports estimated over each grouping. We refer to our framework as Multiple Grouping (MuG). The main intuition behind MuG is that if a variable v is selected in one iteration, it may not be selected in another iteration since the variable may be grouped with other variables that are all zero. Figure 1 illustrates MuG using a simple example.

MuG Using Group Lasso: The MuG framework can be applied in conjunction with group based variable selection algorithms. We study the application of the MuG framework with group Lasso (Yuan and Lin, 2007), which uses a modification of the Lasso to perform variable selection over groups.

Parameter Free Screening: Using properties of the Lasso and the group Lasso, we show that when $p > n$, MuG with group Lasso can perform screening without using a tuning parameter in such a way that $|\bar{S}| < n$. Theoretically, we establish conditions under which MuG is high-dimensional consistent so that $P(S^* \subseteq \bar{S}) \rightarrow 1$ as $n, p \rightarrow \infty$.

1.3 Related Work on Screening Algorithms

Fan and Lv (2008) outline a screening algorithm, referred to as sure independence screening (SIS) or marginal regression (Genovese et al., 2012), that² thresholds $|X^T y|$ to find $\bar{S}$. Extensions of SIS have been proposed in (Fan et al., 2009; Fan and Song, 2010; Fan et al., 2011a; Ke et al., 2012). The performance of SIS is sensitive to the choice of the threshold and an appropriate choice of the threshold depends on the unknown parameters of the underlying system. The main advantage of MuG over SIS is that, when $p > n$, screening may be done without using a tuning parameter or a threshold. Moreover, our numerical simulations clearly show that the MuG framework can discard more variables when compared to SIS. Since the SIS algorithm is computationally fast, it may be used in conjunction with the MuG framework by choosing a small threshold to trade-off computational complexity and accuracy.

Recent works in (Tibshirani et al., 2011; El Ghaoui et al., 2011; Xiang et al., 2011; Xiang and Ramadge, 2012) have analyzed the solutions of the Lasso to derive rules for discarding variables when solving the Lasso in (2) for a particular λ . These algorithms perform screening for the estimate $\hat{S}^0(\lambda)$ and the algorithms extend to the group Lasso estimator. Our work differs from this work since we perform screening to find a superset of the true support S^* . Regardless, when using the Lasso and the group Lasso with the MuG framework, the algorithms in (Tibshirani et al., 2011; El Ghaoui et al., 2011; Xiang et al., 2011; Xiang and Ramadge, 2012) can be used to improve the computational complexity of solving the Lasso and group Lasso problems.

Another approach to parameter free screening is to use properties of variable selection algo-

²Assuming the columns of X are normalized so that $\|X_i\|_2/\sqrt{n} = 1$.

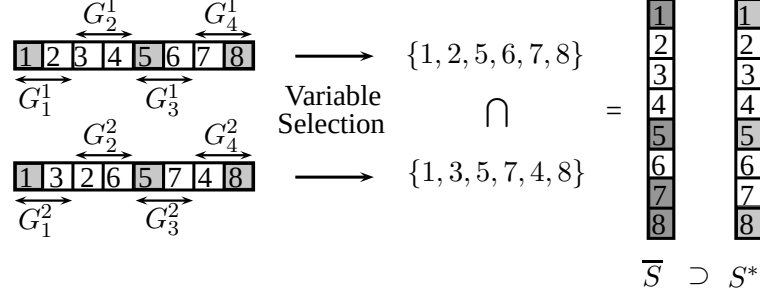


Figure 1: An illustration of the Multiple Grouping (MuG) framework. The true support is $S^* = \{1, 5, 8\}$ and the estimated superset is $\bar{S} = \{1, 5, 7, 8\}$.

rithms such as the Lasso. It is known that the Lasso can only select at most $\min\{n, p\}$ variables (Osborne et al., 2000; Liu and Zhang, 2009). This means that screening can be done by selecting a λ in (2) such that $|\hat{S}^0(\lambda)| = n$. In our proposed algorithm of using MuG with group Lasso (see Algorithm 2), we use the Lasso to do parameter free screening and then use the group Lasso multiple number of times to further screen for variables. We find conditions under which the group Lasso estimator can remove variables from the Lasso estimator. Moreover, our numerical simulations clearly show the improvements in using the group Lasso estimator after using the Lasso. Finally, it is known that cross-validated solutions to the Lasso have the screening property (Meinshausen and Bühlmann, 2006). Thus, we can use the cross-validated Lasso solutions with the MuG solutions to find another estimate of the superset of S^* .

1.4 Organization

The rest of the paper is organized as follows:

- Section 2 presents the the MuG framework with respect to an abstract group based variable selection algorithm.
- Section 3 shows how MuG can be used with the group Lasso estimator.
- Section 4 outlines conditions under which MuG leads to a screening algorithm that is high-dimensional consistent.
- Section 5 presents numerical simulations that show the advantages of using MuG in practice and compares MuG to other screening algorithms.
- Section 6 discusses some extensions of the MuG framework.
- Section 7 summarizes the paper.

2. Multiple Grouping (MuG) for Screening: Overview of Algorithm

In this Section, we give an overview of the Multiple Grouping (MuG) framework when used in conjunction with an abstract variable selection algorithm. Let $V = \{1, \dots, p\}$ index β^* defined in (1). Define a collection of K partitions or groupings of V :

$$\mathcal{G}^i = \{G_1^i, \dots, G_{d_i}^i\}, \quad 1 \leq |G_j^i| \leq m \ll n \quad (6)$$

$$\bigcup_{j=1}^{d_i} G_j^i = V \quad (7)$$

$$G_{j_1}^{(i)} \cap G_{j_2}^i = \emptyset, j_1, j_2 \in \{1, \dots, d_i\}. \quad (8)$$

We have assumed that each group G_j^i has at least one element and at most m elements, where m is small when compared to n and p . Moreover, the groups in a grouping $\mathcal{G}^i$ are chosen such that they are disjoint and all elements in V are mapped to a group in $\mathcal{G}^i$. Let **Alg** be a generic variable selection algorithm:

$$\widehat{S}^i = \text{Alg}(y, X, \lambda, \mathcal{G}^i) \quad (9)$$

$$y = \text{Observations in (1)} \quad (10)$$

$$X = \text{Design matrix in (1)} \quad (11)$$

$$\lambda = \text{Tuning parameter} \quad (12)$$

$$\mathcal{G}^i = \text{Defined in (6)-(8)} \quad (13)$$

The set $\widehat{S}^i$ is an estimate of the true support S^* . We assume that, under certain conditions, **Alg** can select all groups G_j^i such that $\beta_{G_j^i}^* \neq 0$. The multiple grouping (MuG) framework for variable selection is to apply the variable selection algorithm **Alg** over multiple groupings $\mathcal{G}^i$ to obtain a sequence of estimates $\{\widehat{S}^1, \dots, \widehat{S}^K\}$. The final estimated superset of the support S^* is the intersection of all the estimates. Algorithm 1 summarizes the MuG framework and Figure 1 illustrates MuG using $K = 2$.

Algorithm 1: Multiple Grouping (MuG)

– Compute $\widehat{S}^i$ for $i = 1, \dots, K$ using (9).

– Return $\overline{S} = \bigcap_{i=1}^K \widehat{S}^i$.

Typical applications of group based variable selection algorithms assume that it is known a priori which groups of variables in β^* are non-zero or zero. Our setting is different since we assume that β^* is sparse (and not necessarily group sparse) and group variables to estimate a superset of the true support. Since the groupings can be chosen arbitrarily, we repeat this process multiple number of times using different groupings and take an intersection over all the estimates to find the final estimated superset of the true support. Note that the MuG framework can be easily extended to cases where β^* is known to be group sparse, see Section 6 for more details. The choice of the various parameters, namely λ , K , and $\mathcal{G}^i$, are briefly discussed next.

Choosing λ : The parameter λ controls the number of variables selected in each iteration of the MuG framework. We want to choose λ so that all variables in S^* are included in each $\widehat{S}^i$ with high probability while $\widehat{S}^i$ is as small as possible. This will ensure that $S^* \subseteq \overline{S}$ with high probability. One way of doing this is by carefully choosing λ using some model selection algorithm, such as cross-validation. However, this can be computationally challenging and probably no different than using

cross-validation in the original variable selection algorithm without any groups. In our proposed approach for parameter free screening, we make use of the property that solutions to Lasso based algorithms select at most n variables. When selecting groups, this means that at most n groups will be selected. This allows for choosing λ without using any model selection algorithm.

Choosing K : The parameter K controls the number of groupings we form in the MuG framework. It is clear that $|\bar{S}|$ decreases or remains the same as K increases. However, we do not want K to be too large since, with small probability, there may exist a grouping for which we may discard an element in S^* . On the other hand, choosing K to be too small may not result in significant reduction in dimensionality. We show that when using Lasso based variable selection algorithms, choosing K such that $K/(p/m)^2 \rightarrow 0$ is sufficient to ensure consistency of the screening algorithm.

Choosing $\mathcal{G}^i$: We discuss two methods for choosing $\mathcal{G}^i$. The first method chooses $\mathcal{G}^i$ by randomly partitioning the set of indices V . The second method chooses $\mathcal{G}^{i+1}$ using the estimates $\hat{S}^i, \dots, \hat{S}^1$. Our numerical simulations compare both these methods and also discusses the trade-offs in choosing m , i.e., the maximum size of the groups in $\mathcal{G}^i$.

3. MuG Using Group Lasso

So far, we have given an overview of the Multiple Grouping (MuG) framework using an abstract variable selection algorithm. In this Section, we show how MuG can be used with the group Lasso estimator, which was proposed in (Yuan and Lin, 2007) as an extension to the Lasso for variable selection and prediction given prior knowledge about groups of variables that are either zero or non-zero. Section 3.1 outlines the MuG framework using the group Lasso. Section 3.2 analyzes the MuG framework and gives some insight as to why the MuG framework may successfully perform screening. Section 3.3 presents an algorithm for grouping variables and empirically evaluates the algorithm using a simple numerical example.

3.1 Main Algorithm

Let $\mathcal{G}^i$ be a grouping defined in (6)-(8) with d_i groups. The weighted $(1, \nu)$ -norm, using the grouping $\mathcal{G}^i$, is defined as follows:

$$\|\beta\|_{\mathcal{G}^i, \nu} = \sum_{j=1}^{d_i} \sqrt{m_{ij}} \|\beta_{G_j^i}\|_{\nu}, \quad (14)$$

where $m_{ij} = |G_j^i|$. The group Lasso, first proposed in (Yuan and Lin, 2007), solves the following optimization problem:

$$\text{Group Lasso: } \hat{\beta}^i(\lambda) = \arg \min_{\beta \in \mathbb{R}^p} \left\{ \frac{1}{2n} \|y - X\beta\|_2^2 + \lambda \|\beta\|_{\mathcal{G}^i, 2} \right\}. \quad (15)$$

When $G_j^i = \{j\}$, the group Lasso reduces to the Lasso in (2). In the literature, the group Lasso is also referred to as ℓ_1/ℓ_2 -regularized least squares or ℓ_1/ℓ_ν -regularized least squares when $\|\beta\|_{\mathcal{G}^i, 2}$ is replaced by $\|\beta\|_{\mathcal{G}^i, \nu}$. Let $\hat{S}^i(\lambda)$ be the support of $\hat{\beta}^i(\lambda)$. Let the support over the groups be $\hat{S}_{\mathcal{G}^i}(\lambda)$ such that

$$\hat{S}_{\mathcal{G}^i}(\lambda) = \{G_j^i : \hat{\beta}_{G_j^i}^i(\lambda) \neq 0\}. \quad (16)$$

In other words, $\widehat{S}_{\mathcal{G}^i}(\lambda)$ is the set of groups in $\mathcal{G}^i$ selected by the group Lasso estimator. The following Lemma, proved in (Liu and Zhang, 2009), characterizes the cardinality of $\widehat{S}_{\mathcal{G}^i}(\lambda)$.

Lemma 3.1 (Liu and Zhang (2009)). *For all $\lambda > 0$, $|\widehat{S}_{\mathcal{G}^i}(\lambda)| \leq \min\{n, d_i\}$, where d_i is the number of groups in the grouping $\mathcal{G}_i$. Moreover, if $G_1^i, \dots, G_{n_\lambda}^i$ are the groups selected by the group Lasso estimator $\widehat{\beta}^i(\lambda)$ in (15), then the vectors*

$$X_{G_1^i} \widehat{\beta}_{G_1^i}^i(\lambda), X_{G_2^i} \widehat{\beta}_{G_2^i}^i(\lambda), \dots, X_{G_{n_\lambda}^i} \widehat{\beta}_{G_{n_\lambda}^i}^i(\lambda) \quad (17)$$

are linearly independent.

Using Lemma 3.1, we see that the Lasso can select at most $\min\{n, p\}$ variables and the group Lasso can select at most $\min\{n, d_i\}$ groups of variables. The second part of Lemma 3.1 identifies a relationship between the estimates and the columns of X . The exact maximum number of groups or variables selected depend on the columns of X . For example, when solving the Lasso, if $n - 1$ columns are linearly independent and the rest of the columns are linear dependent on one of the other columns, then the Lasso can select at most $n - 1$ variables.

Algorithm 2: MuG using Group Lasso

- Assume $p > n$.
- Solve (2) and choose³ λ_0 s.t. $|\widehat{S}^0(\lambda_0)| = n$.
- Initialize $\overline{S} = \widehat{S}^0(\lambda_0)$.
- For $i = 1, \dots, K$
 - Choose a grouping $\mathcal{G}^i$ that satisfies (6)-(8) and $d_i > n$.
 - Solve (15) using $\mathcal{G}^i$ and choose³ λ_i s.t. $|\widehat{S}_{\mathcal{G}^i}(\lambda)| = n$
 - Let $\widehat{S}^i(\lambda_i)$ be the support of the group Lasso estimator and update $\overline{S}$:

$$\overline{S} = \overline{S} \cap \widehat{S}^i(\lambda_i)$$

When $p > n$, we can easily perform screening by solving the Lasso problem in (2) to select at most n variables. Using the MuG framework, we may further reduce the dimensionality of the problem. Algorithm 2 outlines the MuG framework when used in conjunction with the group Lasso estimator in (15). We first solve the Lasso by choosing a λ that selects at most n variables. If n variables can not be selected, we select the maximum number of variables the Lasso can select. Next, we solve the group Lasso for multiple different choices of the groupings in such a way that at most n groups are selected. Again, if n groups can not be selected, we choose the maximum number of groups possible. The final step is to take an intersection over all the supports to find an estimate $\overline{S}$. Some remarks about Algorithm 2 are as follows.

³If n variables can not be selected, the λ_0 chosen will be $\lambda_0 = \arg \max_{\lambda} |\widehat{S}^0(\lambda)|$. Similarly, for the group Lasso, if n groups can not be selected, the λ_i chosen will be $\lambda_i = \arg \max_{\lambda} |\widehat{S}_{\mathcal{G}^i}(\lambda)|$.

1. **Practical Implementation.** When using standard implementations of the Lasso and the group Lasso, it may not be computationally feasible for all solutions of the Lasso to have support of size less than or equal to n . Thus, in practice, we apply the Lasso for multiple different values of λ and choose a λ for which the estimated support is the smallest above $n - 1$. A similar step is done for the group Lasso solution.
2. **Why MuG?** It is clear that $|\bar{S}| \leq |\hat{S}^0(\lambda_0)|$. The main advantage of using MuG is when $|\bar{S}| < |\hat{S}^0(\lambda_0)|$. This will happen if the group Lasso discards some of the variables estimated by the Lasso. Our numerical simulations in Section 5 show that this is indeed the case.

3.2 Insight into the MuG Framework

In this Section, we identify a sufficient condition on the matrix X such that $|\bar{S}| < |\hat{S}^0(\lambda_0)|$. For simplicity, we apply MuG with $K = 1$ so that

$$\bar{S} = \hat{S}^0(\lambda_0) \cap \hat{S}^1(\lambda_1), \quad (18)$$

where $\hat{S}^0(\lambda_0)$ is the support estimated using Lasso and $\hat{S}^1(\lambda_1)$ is support estimated using group Lasso for a grouping $\mathcal{G}^1$. We want to understand the conditions under which $\bar{S}$ will discard at least one element from $\hat{S}^0(\lambda_0)$. Consider the following assumptions.

(P1) The set $\hat{S}^0(\lambda_0)$ contains the first n elements, i.e., $\hat{S}^0(\lambda_0) = \{1, 2, \dots, n\}$.

(P2) Let $\mathcal{G}^1$ be defined as follows:

$$G_j^1 = \{j\}, \text{ for } j = 1, \dots, n-1 \quad (19)$$

$$G_n^1 = \{n, n+1\} \quad (20)$$

$$G_j^1 = \{j+1\}, \text{ for } j = n+1, \dots, p-1. \quad (21)$$

(P3) If the group G_j^1 is selected, then $\min_{l \in G_j^1} |\hat{\beta}_l| > 0$.

Assumptions (P1) and (P2) simplify notation. Assumption (P3) says that if the group Lasso selects a group, then all estimated values in that group are non-zero. Given (P1)-(P3), we want to find sufficient conditions under which the group G_n^1 will not be selected by the group Lasso estimator.

Theorem 3.1. *Given (P1)-(P3), if the vectors $X_1, X_2, \dots, (X_n + \gamma X_{n+1})$ are linearly dependent for all $\gamma > 0$, then $|\bar{S}| < |\hat{S}^0(\lambda_0)|$.*

Proof Suppose $X_1, X_2, \dots, (X_n + \gamma X_{n+1})$ are linearly dependent for all $\gamma > 0$ and $|\bar{S}| = |\hat{S}^0(\lambda_0)|$. This means that $\hat{S}^0(\lambda_0) \subseteq \hat{S}^1(\lambda_1)$, which implies that the groups $G_1^1, \dots, G_n^1$ are selected by the group Lasso estimator. Using Lemma 3.1 and (P3), we have that

$$X_1, X_2, \dots, (X_n + \alpha X_{n+1})$$

are linearly independent for some $\alpha > 0$. This leads to a contradiction. $\square$

It is easy to generalize Theorem 3.1 when arbitrary groupings $\mathcal{G}^1$ are selected instead of the specialized grouping defined in (19)-(21). The sufficient condition in Theorem 3.1 is fairly strong and

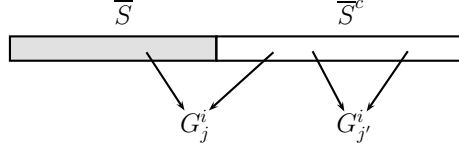


Figure 2: Illustration of the adaptive grouping algorithm where we either group one variable from $\bar{S}$ with variables from $\bar{S}^c$ or group variables in $\bar{S}^c$ together.

we conjecture that the condition can be weakened significantly. This will be clear when we present numerical simulations. Regardless, Theorem 3.1 gives insight as to why MuG can remove some of the variables selected by the Lasso. Informally, if X_{n+1} is chosen such that it strongly depends on some of the columns selected by the Lasso, the group Lasso may not select the group containing $\{n, n+1\}$ since there may exist another variable n' such that $X_1, X_2, \dots, X_{n'}$ leads to a better approximation.

3.3 Choosing the Groupings

This Section addresses the problem of choosing the groupings $\mathcal{G}^i$ in the MuG framework. We consider two such methods.

- (a) *Random Groupings*: Partition the index set randomly such that each group in $\mathcal{G}^i$ has at most m elements.
- (b) *Adaptive Groupings*: Let $\bar{S}$ be the current estimate after running the MuG framework $i-1$ times. To construct the grouping $\mathcal{G}^i$, randomly group an element in $\bar{S}$ with at most $m-1$ elements from $\bar{S}^c$. Once all elements in $\bar{S}$ have been grouped, randomly group the remaining elements in groups of size at most m . Figure 2 illustrates this adaptive construction.

The adaptive grouping algorithm is motivated from Theorem 3.1. In particular, suppose $X_1, \dots, X_n$ are selected by the Lasso. From Lemma 3.1, we know that these vectors must be independent. This implies that the vectors $X_1, X_2, \dots, (X_{n-1} + \gamma X_n)$ are linearly independent for all $\gamma > 0$. Thus, if $n-1$ and n are grouped together, there is high chance that the estimated support will always contain $\{1, \dots, n\}$.

To compare the performance of the two grouping algorithms, consider the linear model in (1) with the following parameters:

- $p = 100$, $n = 30$, $k = 5$, and $\sigma = 1.0$.
- All non-zero elements in β^* have magnitude 1.0.
- Each entry in X is sampled independently from a standard normal distribution.

Note that the MuG framework is sensitive to the choice of the K groupings. A different choice of the groupings may result in a different output $\bar{S}$. To study the properties of $\bar{S}$, we fix X and w and apply MuG 200 times over different choices of the K set of groupings for both random and adaptive groupings. Figure 3 shows the histogram of the cardinality of $\bar{S}$.

From the histogram, it is clear that the adaptive groupings approach results in estimates that have lower cardinality than that of the random groupings approach. For all the 400 instances (200

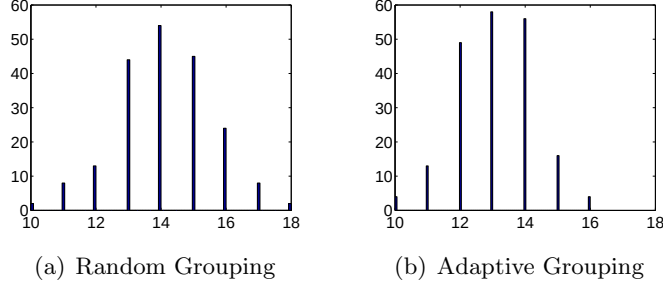


Figure 3: Histogram of $|\bar{S}|$ when applying MuG 200 times over different choices of the set of groupings. The parameters are $p = 100$, $n = 30$, $k = 5$, $\sigma = 1$, $m = 2$, and $K = 50$. In (a), we choose the groupings by randomly partitioning the index set in groups of size m . In (b), we adaptively choose the groupings in each iteration of the MuG framework as described in Figure 2.

each for random and adaptive groupings), $\bar{S}$ contained the true support S^* . Furthermore, the Lasso always selected 30 variables and the histogram clearly shows that MuG discarded on average about half the variables estimated by the Lasso. We refer to Section 5 for additional numerical simulations showing the advantages of the MuG framework.

4. Theoretical Analysis: High-Dimensional Consistency

In this Section, we find conditions under which the MuG framework in Algorithm 2 is high-dimensional consistent so that $P(S^* \subseteq \bar{S}) \rightarrow 1$ as $n, p \rightarrow \infty$. For a grouping $\mathcal{G}^i$, let $S_{\mathcal{G}^i}^*$ be the set of groups that contains at least one non-zero element. Following (Negahban et al., 2010), define the set $\mathbb{C}(S_{\mathcal{G}^i}^*)$ such that

$$\mathbb{C}(S_{\mathcal{G}^i}^*) = \left\{ \xi \in \mathbb{R}^p : \sum_{G_j^i \notin S_{\mathcal{G}^i}^*} \|\xi_{G_j^i}\|_2 \leq 3 \sum_{G_j^i \in S_{\mathcal{G}^i}^*} \|\xi_{G_j^i}\|_2 \right\}. \quad (22)$$

For a suitable choice of the regularization parameter, Negahban et al. (2010) show that the error $(\hat{\beta}^i(\lambda) - \beta^*) \in \mathbb{C}(S_{\mathcal{G}^i}^*)$. Recall the model in (1) where X and y are known, β^* is unknown, k is the number of non-zero entries in β^* , and w is the measurement noise. Consider the following assumptions on $\mathcal{G}^i$, X , w , k , and β^* :

$$k \leq \min\{n, p\} \quad (23)$$

$$|G_j^i| = m, \quad i = 1, \dots, K, j = 1, 2, \dots, d_i \quad (24)$$

$$\frac{\|X_j\|_2}{\sqrt{n}} \leq 1, \quad \forall j = 1, 2, \dots, p \quad (25)$$

$$w \sim \mathcal{N}(0, \sigma^2 I_{n \times n}) \quad (26)$$

$$\frac{\|X\xi\|_2^2}{n} \geq \tau \|\xi\|_2^2, \quad \forall \xi \in \mathbb{C}(S_{\mathcal{G}^i}^*), \quad i = 0, \dots, K \quad (27)$$

$$\beta_{\min} = \min_{k \in V} |\beta_k^*| > \frac{8\sigma\sqrt{k}}{\tau} \left(\sqrt{\frac{m}{n}} + \sqrt{\frac{\log p}{n}} \right) \quad (28)$$

$$\lim \frac{K}{(p/m)^2} = 0. \quad (29)$$

The parameters τ and σ are constants. We assume that the parameter p scales with n such that $p \rightarrow \infty$ as $n \rightarrow \infty$. Further, K , k , and m are also allowed to scale with n .

Theorem 4.1 (Consistency of Screening). *If (23)-(29) hold, then $|\bar{S}| \leq n$ and $P(S^* \subseteq \bar{S}) \rightarrow 1$ as $n, p \rightarrow \infty$, where $\bar{S}$ is computed using Algorithm 2 and the probability is with respect to the random noise w .*

Proof See Appendix A. □

Remarks:

1. We discuss the assumptions in (23)-(26). Equation (23) ensures that k or more than k variables are selected in each iteration of the MuG framework. For notational simplicity, all the groups in $\mathcal{G}^i$ are chosen to be of the same size in (24). Similar results can be obtained by appropriately scaling the design matrix X when considering different group sizes. The normalization in (25) is a standard assumption and the upper bound of one can be replaced by a constant, which will change the subsequent assumptions. The Gaussian assumption in (26) can be generalized so that w has sub-Gaussian tails (Negahban et al., 2010).
2. Equation (27) on the design matrix X is known as restricted strong convexity (RSC); see (Negahban et al., 2010) for a detailed description of this assumption. Informally, RSC ensures that the loss function, $\|y - X\beta\|_2^2$ in our setting, has sufficient curvature around the optimal solution. Equation (27) is important to prove consistency of the Lasso and the group Lasso estimator using the methods in (Negahban et al., 2010). We note that alternative conditions may also be imposed on X following the analysis in (Van De Geer and Bühlmann, 2009; Bickel et al., 2009; Meinshausen and Yu, 2009; Liu and Zhang, 2009). In addition, we refer to (Negahban et al., 2010) for results on what type of matrices satisfy (27).
3. The assumption in (28) imposes a lower bound on $\beta_{\min}$, the minimum absolute value of the non-zero entries in β^* . Informally, a small $\beta_{\min}$ requires more observations for consistent estimation using Lasso and group Lasso. It is interesting to see how $\beta_{\min}$ scales with the group size m . If we do not use MuG and simply use the Lasso for screening, (28) reduces⁴ to $\beta_{\min} > \frac{8\sigma}{\tau} \sqrt{\frac{k \log p}{n}}$. Using MuG with group Lasso increases the lower bound on $\beta_{\min}$ by $\frac{8\sigma}{\tau} \sqrt{\frac{km}{n}}$. Thus, although the MuG framework may result in screening such that $|\bar{S}| < n$, this comes at the cost of requiring the minimum absolute value in β^* to be larger than that required when simply using the Lasso for screening ($K = 0$ in Algorithm 2). Stated differently, using the MuG framework requires an additional $(64\sigma^2 km)/(\tau^2 \beta_{\min}^2)$ number of observations for consistent screening when compared to the Lasso. We will further explore this trade-off using numerical simulations in Section 5.
4. The final assumption in (29) says how many times MuG can be applied for consistent screening. If m is a constant so that it does not scale with n or p , choosing $K = p^\gamma$, where $\gamma < 2$, is sufficient for consistent high-dimensional screening.

⁴See Lemma A.1 in Appendix A.

5. Numerical Simulations

In this Section, we provide extensive numerical simulations to show the advantages of using MuG in practice. We assume the linear model in (1) with $\sigma = 0.5$ and consider three different choices of the $n \times p$ design matrix X .

- (IND) Each entry X_{ij} is sampled independently from $\mathcal{N}(0, 1)$. We let $p = 1000$ and $n = 100, 300$, or 500 depending on the example considered.
- (TOP) Each row in X is sampled independently from $\mathcal{N}(0, \Sigma)$, where Σ is a $p \times p$ covariance matrix that is Toeplitz such that $\Sigma_{ij} = \mu^{|i-j|}$, where we choose $\mu = -0.4$. We let $p = 1000$ and $n = 100, 300$, or 500 depending on the example considered.
- (RL) We use preprocessed data from (Li and Toh, 2010), where $p = 587$ and $n = 148$, such that each row of X corresponds to gene expression values from p genes relating to Lymph node status for understanding breast cancer treatment (Pittman et al., 2004).

The matrices in (IND) and (TOP) satisfy the so called mutual incoherence property (Zhao and Yu, 2006; Meinshausen and Bühlmann, 2006; Wainwright, 2009) such that exact support recovery is possible using the Lasso given sufficient number of observations. The matrix in (C) does not satisfy mutual incoherence, which means that no matter how many observations are made of β^* , the support S^* can not be estimated exactly using Lasso. Finally, we always normalize the columns of X such that $\|X_i\|_2/\sqrt{n} = 1$. We evaluate four possible screening algorithms:

- MuG: This is our proposed algorithm outlined in Section 3 (see Algorithm 2).
- SIS: This is the sure independence screening algorithm proposed in (Fan and Lv, 2008). Given that the columns are normalized, the algorithm computes $\bar{S}$ by thresholding $\omega = |X^T y|$ such that $\bar{S} = \{i : \omega_i > \tau\}$. When comparing MuG and SIS, we choose the threshold so that the estimates from both SIS and MuG have the same cardinality.
- LCV: This is cross-validated Lasso, where we select λ in (2) using cross-validation. We randomly chose 70% of the data for training and the rest for testing and applied Lasso on a grid of values and repeated this process 50 times. The final λ chosen minimized the mean negative log-likelihood over the training data. It has been shown theoretically (Meinshausen and Bühlmann, 2006) and observed empirically that this method may be used to perform screening. In fact, algorithms such as the adaptive Lasso and the thresholded Lasso use LCV as the first stage in estimating β^* and S^* .
- MuG+LCV: This computes the intersection of MuG and LCV. The main motivation behind using this method is that since both LCV and MuG result in screening and both the methods are different, the intersection of the results from both these methods can result in a $\bar{S}$ that has lower cardinality.

We evaluate screening algorithms using the false positive rate (FPR) and the false negative rate (FNR), which are defined as follows:

$$FPR = \frac{|\bar{S} \setminus S^*|}{|\bar{S}|} \text{ and } FNR = \frac{|S^* \setminus \bar{S}|}{|S^*|}. \quad (30)$$

FPR reflects the fraction of variables in $\bar{S}$ that are not in S^* and FNR reflects the fraction of variables in S^* that are not in $\bar{S}$. In general, we want both the FPR and FNR to be as small as possible. Section 5.1 discusses results on applying MuG for different choices of the number of groupings K . Section 5.2 discusses results on how the MuG estimates depend on the group size m and the parameter $\beta_{\min}$.

5.1 Number of Groupings K

Figures 4 and 5 show results on applying various screening algorithms when X is generated as described by (IND), (TOP), and (RL) and $\beta_{\min} = 0.5$. The x -axis in all figures is the value of K and the y -axis is either the FPR or FNR of a screening algorithm. The lines are mean values of either the FPR or FNR and the shaded regions are the standard deviation of the FPR. For MuG, we always show the FPR using error bars. The LCV method is independent of K , which is why it does not change with K .

Remarks:

1. We clearly see that as K increases, the FPR decreases and the FNR either remains constant or increases at a very small rate. For cases when $p \gg n$, the FPR decreases at a larger rate and the FNR increases at a small rate. This is because, when $n \ll p$, MuG removes more variables in each iteration than when $n < p$.
2. We observe that MuG based algorithms perform better than simply using cross-validation (LCV) or using the sure independence screening (SIS) algorithm. The difference between MuG and SIS is more pronounced in cases where p is much greater than n , see for example Figure 4(a) and Figure 4(d).
3. Combining LCV and MuG, which we refer to as MuG+LCV, leads to a much smaller FPR, while only increasing the FNR by a small amount. On the other hand, simply using LCV results in a much larger FPR. For example, in Figure 4(a), LCV has a FPR of 0.8 whereas MuG+LCV has an FPR of about 0.2.
4. The difference between the performance of MuG and SIS is more pronounced in Figure 5, where the matrix X corresponds to real measurements of gene expression values. For example, in Figure 5(a), MuG has an FNR of nearly 0 and SIS has an FNR of nearly 0.8. This means that for the same cardinality of $\bar{S}$, the estimate of MuG contains nearly all the true variables, while SIS is only able to retain 20% of the true variables.

5.2 Size of the Groups m and the Parameter $\beta_{\min}$

In this Section, we present numerical simulations to study the performance of MuG as the size of the groupings m and the parameter $\beta_{\min}$ change. Figure 6(a) shows results for the (IND) example with $p = 1000$, $n = 100$, $k = 10$, and $\beta_{\min} = 2.0$. We applied MuG using different choices of m ranging from 2 to 10 and chose $K = 100$. As m increases, the mean FPR first decreases and then eventually increases. The mean FNR increases with m . A similar trend is seen in Figure 6(b), where $n = 200$. The only difference is that the number of observations are sufficient for screening, so the FNR is zero as m ranges from 2 to 6. Both these examples show that choosing m to be large

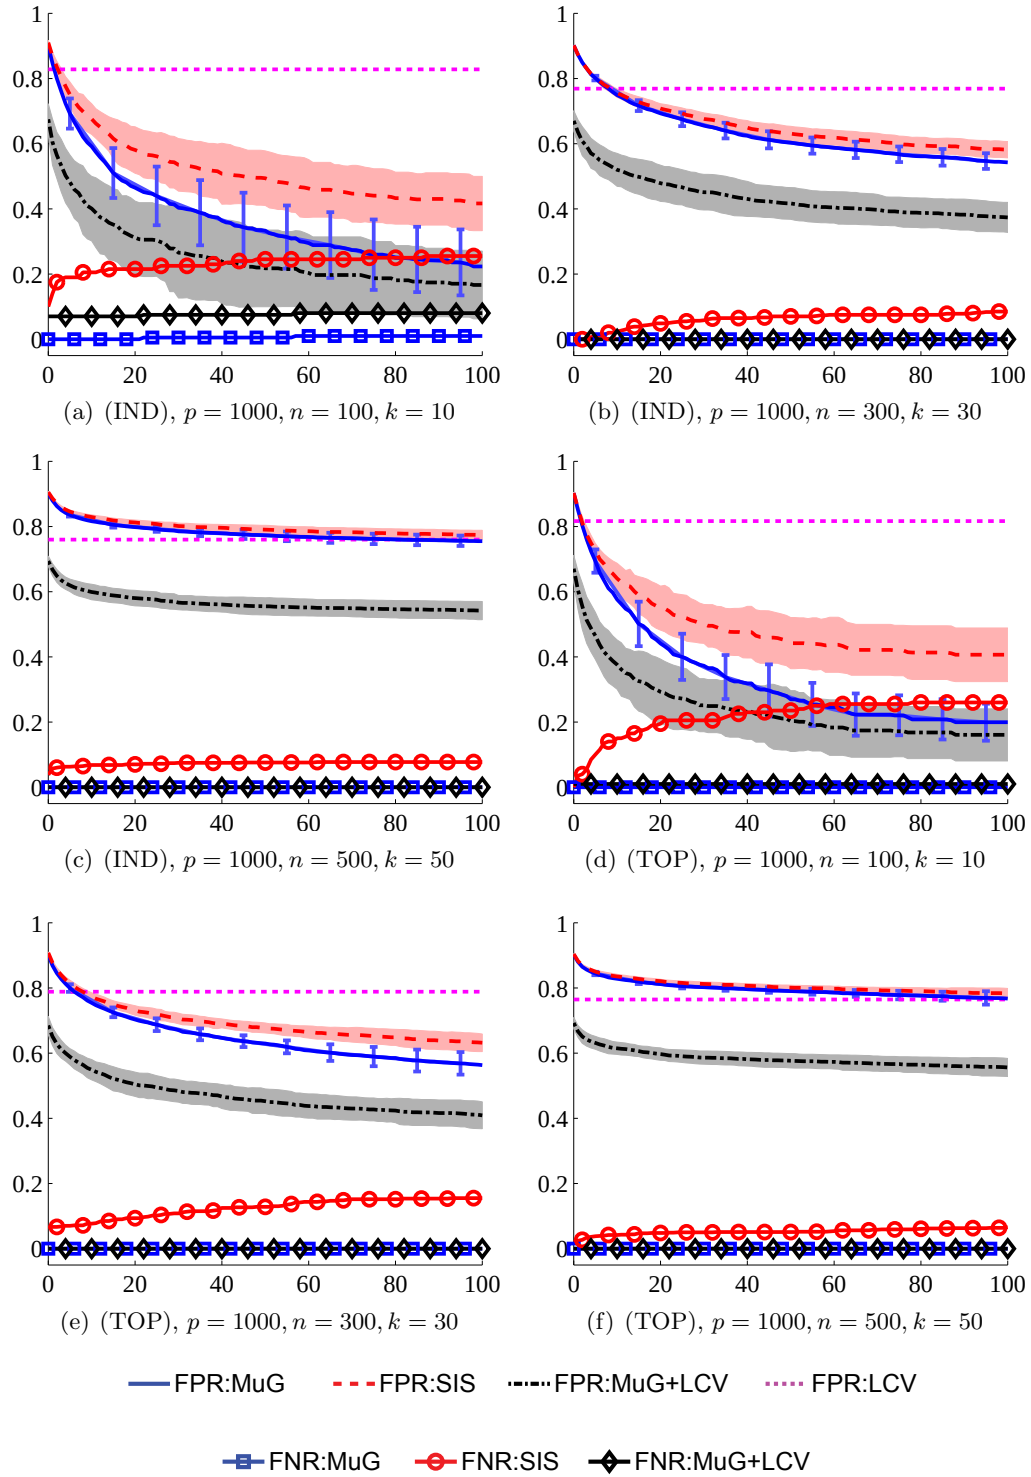


Figure 4: Results when X is sampled from a Gaussian distribution. See Section 5.1 for more details.

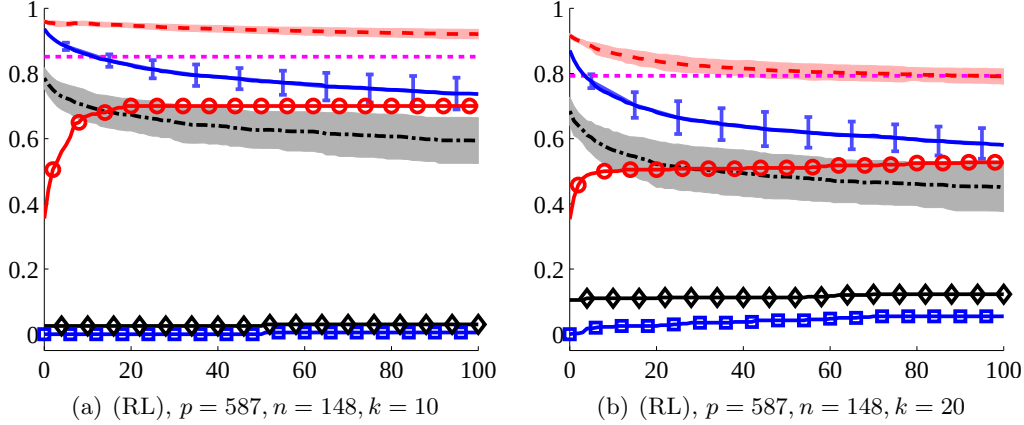


Figure 5: Results when X is the matrix of gene expression values. See Figure 4 for the legend and Section 5.1 for more details.

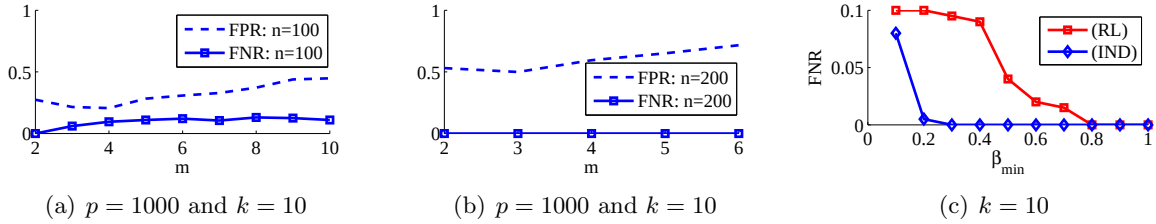


Figure 6: Performance of MuG as the size of the groupings m and $\beta_{\min}$ change. See Section 5.2 for more details.

does not necessarily result in superior screening algorithms. In practice, we find that choosing m as 2, 3, or 4 leads to good screening algorithms.

Figure 6(c) shows results on applying MuG to (IND) and (RL) where we fix all the parameters and vary $\beta_{\min}$. Only one variable in β^* is changed, so it is expected that this particular variable will be difficult to estimate when $\beta_{\min}$ is small. This is indeed the case from the plot in Figure 6(c).

6. Extensions of MuG

We presented the MuG framework in the context of the linear regression problem in (1) with a sparsity constraint on β^* . We now briefly discuss how the MuG framework can be used in conjunction with some other variable selection algorithms.

Beyond Lasso: Although we outlined the MuG framework with respect to an abstract variable selection algorithm in Section 2, we mainly studied the use of MuG in conjunction with the Lasso and group Lasso estimator. In generalizing MuG to other group based variable selection algorithms, such as those in (Yuan and Lin, 2006; Eldar et al., 2010; Baraniuk et al., 2010), it is not immediately clear if MuG will lead to a parameter-free screening algorithm. This will be a subject of future research work.

Structured Sparsity: For many problems, prior knowledge can be useful in constructing better estimates of β^* . For example, if it is known that β^* is group sparse, group based estimators, such

as those in (Yuan and Lin, 2006; Eldar et al., 2010; Baraniuk et al., 2010), can be used to estimate β^* using less number of observations. In this case, MuG can be easily applied by forming groupings over the known groups. For applications in image processing (Baraniuk et al., 2010; Rao et al., 2011), it is natural to assume the variables have a tree-structured sparsity pattern which leads to forming a set of overlapping groups. Again, the MuG framework can be applied by forming the groupings over the overlapping groups and using algorithms in (Jacob et al., 2009) for solving the overlapping group Lasso problem.

Graphical Model Selection: A graphical model is a probability distribution defined on graphs. The nodes in the graph denote random variables and the edges in the graph denote statistical relationships amongst random variables (Lauritzen, 1996). The graphical model selection problem is to estimate the unknown graph given observations drawn from a graphical model. One possible algorithm for estimating the graph is by solving a Lasso problem at each node in the graph to estimate the neighbors of each node (Meinshausen and Bühlmann, 2006). Our proposed algorithm using MuG in Algorithm 2 can be used to estimate a superset of the true edges in the graph. There are many other algorithms in the literature for learning graphical models. One method, which is commonly referred to as the graphical Lasso (Banerjee et al., 2008) or gLasso, solves an ℓ_1 -regularized maximum likelihood problem to estimate a graph. The MuG framework can be applied to gLasso by placing a group penalty on the inverse covariance. However, in this case, it is not clear if parameter-free screening can be done. An alternative method is to assume a conservative upper bound on the number of edges in the graph to perform screening. Our future work will explore this problem.

Exact Support Recovery: Our primary interest in this paper was screening, i.e., to estimate a superset of the true support. Exact support recovery can be easily achieved by applying known algorithms for variable selection once screening has been done. However, it is also of interest to study if exact support recovery or nearly exact support recovery can be achieved using the MuG framework. This may require assuming some upper bound on the support of β^* and then applying MuG with this upper bound.

7. Summary

Accurate high-dimensional variable selection using greedy algorithms require selecting appropriate tuning parameters that must be chosen using computationally challenging methods such as cross-validation or stability selection. Screening, where a superset of the true variables are estimated, can reduce the computational burden of model selection by discarding variables that are not in the true set with high probability. Unfortunately, the performance of current screening algorithms also depends on choosing an appropriate tuning parameter. In this paper, we presented a novel framework for screening, which we refer to as Multiple Grouping (MuG), that groups variables, performs variable selection over the groups, and repeats this process multiple number of times using different choices of the groupings. The final superset of the true variables is computed by taking an intersection over all the estimated sets over each grouping. The main advantage of MuG over other screening algorithms is that MuG can perform screening in the linear regression problem without using a tuning parameter. Theoretically, we proved consistency of the MuG based screening algorithm and our numerical simulations showed the advantages of using MuG in practice. We also discussed some other applications of MuG beyond the linear regression problem.

Acknowledgement

This work was done while in residence at the Institute for Mathematics and its Applications (IMA). We thank the IMA for financial support. We also thank Brendan Ames, Jarvis Haupt, Nikhil Rao, Adam Rothman, and Vincent Tan for discussions and comments that improved the quality of the paper.

Appendix A. Proof of Theorem 4.1

The following two lemmas, proved in (Negahban et al., 2010), establish consistency of the Lasso and group Lasso solutions.

Lemma A.1 (Negahban et al. (2010)). *Under conditions (25)-(27), there exists a λ such that the solution $\hat{\beta}(\lambda)$ to the Lasso problem in (2) satisfies*

$$\|\hat{\beta}(\lambda) - \beta^*\|_2^2 \leq \frac{64\sigma^2}{\kappa^2} \frac{k \log p}{n} \quad (31)$$

with probability at least $1 - c_1/p^2$, where c_1 is a constant.

Lemma A.2 (Negahban et al. (2010)). *Under conditions (24)-(27), there exists a λ such that the solution $\hat{\beta}^i(\lambda)$ to the group Lasso problem in (15) with the grouping $\mathcal{G}^i$ satisfies*

$$\|\hat{\beta}^i(\lambda) - \beta^*\|_2^2 \leq \frac{16\sigma^2 k}{\kappa^2} \left(\sqrt{\frac{m}{n}} + \sqrt{\frac{\log p}{n}} \right)^2 \quad (32)$$

with probability at least $1 - c_2/(p/m)^2$, where c_1 is a constant.

Using Lemma A.1, there exists a λ such that if $k \leq \min\{n, p\}$ and

$$\beta_{\min}^2 > \frac{64\sigma^2}{\tau^2} \frac{k \log p}{n}, \text{ then} \quad (33)$$

$$P(S^* \subseteq \hat{S}^0(\lambda)) \geq 1 - \frac{c_1}{p^2}. \quad (34)$$

Similarly, using Lemma A.2, there exists a λ such that if $k \leq \min\{n, p\}$ and

$$\beta_{\min}^2 > \frac{16\sigma^2 k}{\tau^2} \left(\sqrt{\frac{m}{n}} + \sqrt{\frac{\log p}{n}} \right)^2, \text{ then} \quad (35)$$

$$P(S^* \subseteq \hat{S}^i(\lambda); \mathcal{G}^i) \geq 1 - \frac{c_2}{p^2}. \quad (36)$$

Choosing $\beta_{\min}$ as in (28) ensures that both (33) and (35) are satisfied. Thus, given (28) - (23), the Lasso and the group Lasso can select all the elements in S^* (and possibly more) with high probability. Since Algorithm 2 selects *all possible variables that the Lasso and the group Lasso can select*, we have

$$P(S^* \subseteq \hat{S}^i(\lambda_i); \mathcal{G}^i) \geq 1 - \frac{c_3}{(p/m)^2}, \quad i = 0, 1, \dots, K, \quad (37)$$

where c_3 is a constant, λ_i is the tuning parameter chosen in Algorithm 2, and we let $\mathcal{G}^0 = \{\{1\}, \dots, \{p\}\}$. To complete the proof, we have

$$P(S^* \subseteq \overline{S}; \{\mathcal{G}^0, \mathcal{G}^1, \dots, \mathcal{G}^K\}) = P\left(\bigcap_{i=0}^K \{S^* \subseteq \widehat{S}(\lambda_i)\}; \{\mathcal{G}^0, \mathcal{G}^1, \dots, \mathcal{G}^K\}\right) \quad (38)$$

$$= 1 - P\left(\bigcup_{i=1}^K \{S^* \not\subseteq \widehat{S}(\lambda_i)\}; \{\mathcal{G}^0, \mathcal{G}^1, \dots, \mathcal{G}^K\}\right) \quad (39)$$

$$\geq 1 - \frac{c_3(K+1)}{(p/m)^2} \quad (40)$$

We use the union bound to go from (38) to (39). Choosing K such that $\lim_{n,p \rightarrow \infty} \frac{K}{(p/m)^2} \rightarrow 0$ ensures that $P(S^* \subseteq \overline{S}; \{\mathcal{G}^0, \mathcal{G}^1, \dots, \mathcal{G}^K\}) \rightarrow 1$ as $n, p \rightarrow \infty$. Thus, given a set of groupings $\{\mathcal{G}^0, \mathcal{G}^1, \dots, \mathcal{G}^K\}$, we have established consistency of the MuG screening algorithm. If the groupings are chosen randomly, either using the random grouping or adaptive grouping approaches outlined in Section 3.3, we will still get the same consistency result since the bound in (40) only depends on the maximum size of the group m .

References

- F. Bach. Bolasso: model consistent Lasso estimation through the bootstrap. In *Proceedings of the International Conference on Machine Learning (ICML)*, 2008.
- Onureena Banerjee, Laurent El Ghaoui, and Alexandre d’Aspremont. Model selection through sparse maximum likelihood estimation for multivariate Gaussian or binary data. *J. Mach. Learn. Res.*, 9:485–516, 2008. ISSN 1532-4435.
- R.G. Baraniuk, V. Cevher, M.F. Duarte, and C. Hegde. Model-based compressive sensing. *Information Theory, IEEE Transactions on*, 56(4):1982–2001, 2010.
- P.J. Bickel, Y. Ritov, and A.B. Tsybakov. Simultaneous analysis of lasso and Dantzig selector. *The Annals of Statistics*, 37(4):1705–1732, 2009.
- P. Bühlmann and S. Van De Geer. *Statistics for High-Dimensional Data: Methods, Theory and Applications*. Springer-Verlag New York Inc, 2011.
- E.J. Candès, J. Romberg, and T. Tao. Robust uncertainty principles: Exact signal reconstruction from highly incomplete frequency information. *IEEE Transactions on Information Theory*, 52(2):489–509, 2006.
- J. Chen and Z. Chen. Extended bayesian information criteria for model selection with large model spaces. *Biometrika*, 95(3):759–771, 2008.
- G. Davis, S. Mallat, and M. Avellaneda. Adaptive greedy approximations. *Constructive approximation*, 13(1):57–98, 1997.
- D.L. Donoho. Compressed sensing. *IEEE Transactions on Information Theory*, 52(4):1289–1306, 2006.

- L. El Ghaoui, V. Viallon, and T. Rabbani. Safe feature elimination for the lasso. *Journal of Machine Learning Research. Submitted*, 2011.
- Y.C. Eldar, P. Kuppinger, and H. Bolcskei. Block-sparse signals: Uncertainty relations and efficient recovery. *Signal Processing, IEEE Transactions on*, 58(6):3042–3054, 2010.
- J. Fan and J. Lv. Sure independence screening for ultrahigh dimensional feature space. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, 70(5):849–911, 2008.
- J. Fan and R. Song. Sure independence screening in generalized linear models with np-dimensionality. *The Annals of Statistics*, 38(6):3567–3604, 2010.
- J. Fan, R. Samworth, and Y. Wu. Ultrahigh dimensional feature selection: beyond the linear model. *The Journal of Machine Learning Research*, 10:2013–2038, 2009.
- J. Fan, Y. Feng, and R. Song. Nonparametric independence screening in sparse ultra-high-dimensional additive models. *Journal of the American Statistical Association*, 106(494):544–557, 2011a.
- J. Fan, J. Lv, and L. Qi. Sparse high dimensional models in economics. *Annual review of economics*, 3:291, 2011b.
- C.R. Genovese, J. Jin, L. Wasserman, and Z. Yao. A comparison of the lasso and marginal regression. *Journal of Machine Learning Research*, 13:2107–2143, 2012.
- L. Jacob, G. Obozinski, and J.P. Vert. Group lasso with overlap and graph lasso. In *Proceedings of the 26th Annual International Conference on Machine Learning*, pages 433–440. ACM, 2009.
- T. Ke, J. Jin, and J. Fan. Covariance assisted screening and estimation. *Arxiv preprint arXiv:1205.4645*, 2012.
- Steffen L Lauritzen. *Graphical Models*. Oxford University Press, USA, 1996.
- L. Li and K.C. Toh. An inexact interior point method for l_1 -regularized sparse covariance selection. *Mathematical Programming Computation*, 2(3):291–315, 2010.
- H. Liu and J. Zhang. Estimation consistency of the group lasso and its applications. In *Proceedings of the Twelfth International Conference on Artificial Intelligence and Statistics*. Citeseer, 2009.
- N. Meinshausen and P. Bühlmann. High-dimensional graphs and variable selection with the Lasso. *Annals of statistics*, 34(3):1436, 2006.
- N. Meinshausen and P. Bühlmann. Stability selection. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, 72(4):417–473, 2010.
- N. Meinshausen and B. Yu. Lasso-type recovery of sparse representations for high-dimensional data. *The Annals of Statistics*, 37(1):246–270, 2009.
- S. Negahban, P. Ravikumar, M.J. Wainwright, and B. Yu. A unified framework for high-dimensional analysis of m -estimators with decomposable regularizers. *Arxiv preprint arXiv:1010.2731*, 2010.

- M.R. Osborne, B. Presnell, and B.A. Turlach. On the lasso and its dual. *Journal of Computational and Graphical statistics*, pages 319–337, 2000.
- Y.C. Pati, R. Rezaifar, and PS Krishnaprasad. Orthogonal matching pursuit: Recursive function approximation with applications to wavelet decomposition. In *Twenty-Seventh Asilomar Conference on Signals, Systems and Computers*, pages 40–44. IEEE, 1993.
- J. Pittman, E. Huang, H. Dressman, C.F. Horng, S.H. Cheng, M.H. Tsou, C.M. Chen, A. Bild, E.S. Iversen, A.T. Huang, et al. Integrated modeling of clinical and gene expression information for personalized prediction of disease outcomes. *Proceedings of the National Academy of Sciences of the United States of America*, 101(22):8431, 2004.
- N.S. Rao, R.D. Nowak, S.J. Wright, and N.G. Kingsbury. Convex approaches to model wavelet sparsity patterns. *Arxiv preprint arXiv:1104.4385*, 2011.
- R. Tibshirani, J. Bien, J. Friedman, T. Hastie, N. Simon, J. Taylor, and R.J. Tibshirani. Strong rules for discarding predictors in lasso-type problems. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, 2011.
- Robert Tibshirani. Regression shrinkage and selection via the lasso. *Journal of the Royal Statistical Society, Series B*, 58:267–288, 1996.
- J.A. Tropp and A.C. Gilbert. Signal recovery from random measurements via orthogonal matching pursuit. *IEEE Transactions on Information Theory*, 53(12):4655–4666, 2007.
- S.A. Van De Geer and P. Bühlmann. On the conditions used to prove oracle results for the lasso. *Electronic Journal of Statistics*, 3:1360–1392, 2009.
- Sara van de Geer, Peter Bühlmann, and Shuheng Zhou. The adaptive and the thresholded lasso for potentially misspecified models (and a lower bound for the lasso). *Electronic Journal of Statistics*, 5:688–749, 2011.
- M. J. Wainwright. Sharp thresholds for noisy and high-dimensional recovery of sparsity using ℓ_1 -constrained quadratic programming (Lasso). *IEEE Transactions on Information Theory*, 55(5), May 2009.
- L. Wasserman and K. Roeder. High dimensional variable selection. *Annals of statistics*, 37(5A): 2178, 2009.
- A. Wille, P. Zimmermann, E. Vranová, A. Fürholz, O. Laule, S. Bleuler, L. Hennig, A. Prelic, P. Von Rohr, L. Thiele, et al. Sparse graphical gaussian modeling of the isoprenoid gene network in arabidopsis thaliana. *Genome Biol*, 5(11):R92, 2004.
- Z.J. Xiang and P.J. Ramadge. Fast lasso screening tests based on correlations. In *ICASSP*, 2012.
- Z.J. Xiang, H. Xu, and P.J. Ramadge. Learning sparse representations of high dimensional data on large scale dictionaries. In *Advances in Neural Information Processing Systems*, 2011.
- M. Yuan and Y. Lin. Model selection and estimation in regression with grouped variables. *Journal of The Royal Statistical Society Series B*, 68(1):49–67, 2006.

- M. Yuan and Y. Lin. On the non-negative garrotte estimator. *Journal of The Royal Statistical Society Series B*, 69(2):143–161, 2007.
- T. Zhang. Adaptive forward-backward greedy algorithm for learning sparse representations. *IEEE Transactions on Information Theory*, 57(7):4689–4708, 2011.
- Peng Zhao and Bin Yu. On model selection consistency of lasso. *Journal of Machine Learning Research*, 7:2541–2563, 2006.
- H. Zou. The adaptive Lasso and its oracle properties. *Journal of the American Statistical Association*, 101:1418–1429, December 2006.